

-S4 SUFFIX INDICATES ALL FLOATS ARE NORMALLY CLOSED FLOATS.

-32 SUFFIX INDICATES CUSTOM LABELING THAT MAY DIFFER FROM THE STANDARD LABELING AND/OR NORMALLY OPEN AND NORMALLY CLOSED MAY DIFFER FROM DRAWING ABOVE.

DASHED LINE INDICATES FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE 60°C (167°F).

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

1 07	7/23/16	
DA	ATE:	
04	/10/24	TITLE:
		DATE: 0 04/10/24

THIS DRAWING CONTAINS
PROPRIETARY INFORMATION
AND SHALL NOT BE USED
OR DISCLOSED WITHOUT
PRIOR WRITTEN
AUTHORIZATION.



HLA-4X-10 CONTROL SCHE**M**ATIC


PART NO.


SIZE DWG NO.
B 1596

HLA-4X-10 D

SCALE NONE SHEET 1 OF 6



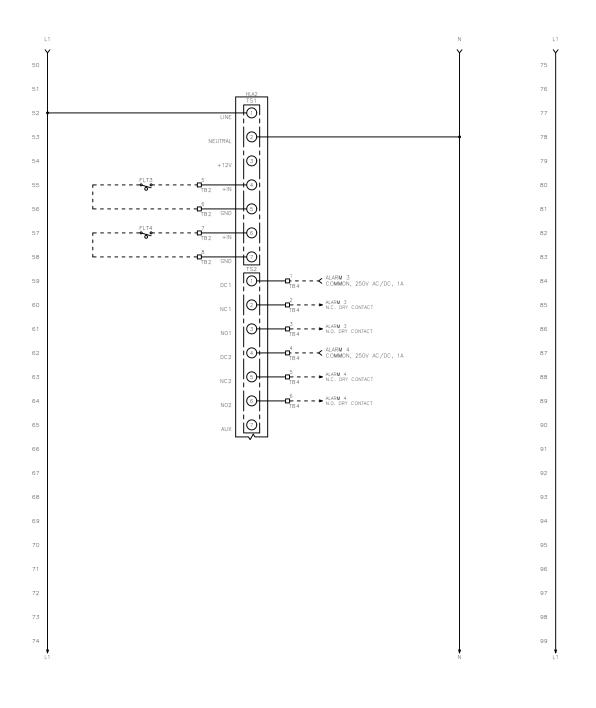

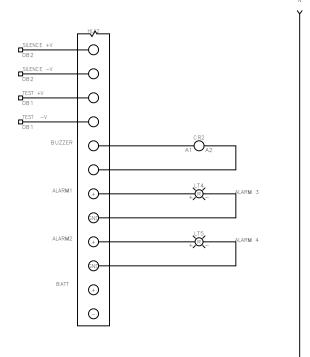

-S4 SUFFIX INDICATES ALL FLOATS ARE NORMALLY CLOSED FLOATS.

-32 SUFFIX INDICATES CUSTOM LABELING THAT MAY DIFFER FROM THE STANDARD LABELING AND/OR NORMALLY OPEN AND NORMALLY CLOSED MAY DIFFER FROM DRAWING ABOVE.

DASHED LINE INDICATES FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE 60°C (167°F).

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

	DATE:	
ММ	07/23/16	
	DATE:	
DO	04/10/24	TITLE:
	MM	MM 07/23/16

THIS DRAWING CONTAINS
PROPRIETARY INFORMATION
AND SHALL NOT BE USED
OR DISCLOSED WITHOUT
PRIOR WRITTEN
AUTHORIZATION.

SEE WIER

HLA-4X-10 Control sche**m**atic


SIZE DWG NO.
B 1596


PART NO. HLA-4X-10

D

SCALE NONE SHEET 2 OF 6



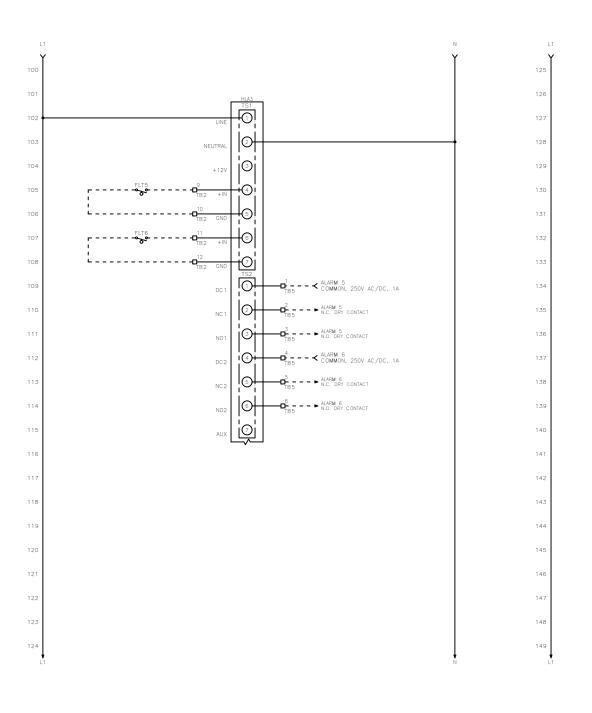

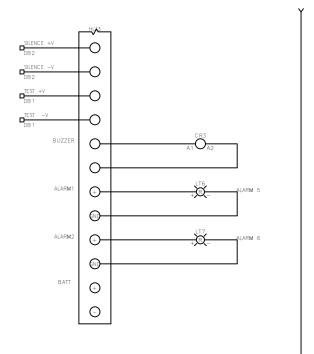

-S4 SUFFIX INDICATES ALL FLOATS ARE NORMALLY CLOSED

-32 SUFFIX INDICATES CUSTOM LABELING THAT MAY DIFFER FROM THE STANDARD LABELING AND/OR NORMALLY OPEN AND NORMALLY CLOSED MAY DIFFER FROM DRAWING ABOVE.

DASHED LINE INDICATES

FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE 60°C (167°F).

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

М	07/23/16	
	DATE:	
0	04/10/24	TITLE:
		DATE:

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.




HLA - 4X - 10CONTROL SCHEMATIC

SIZE DWG NO. PART NO. 1596

SCALE NONE

HLA-4X-10D 3 OF 6

SHEET

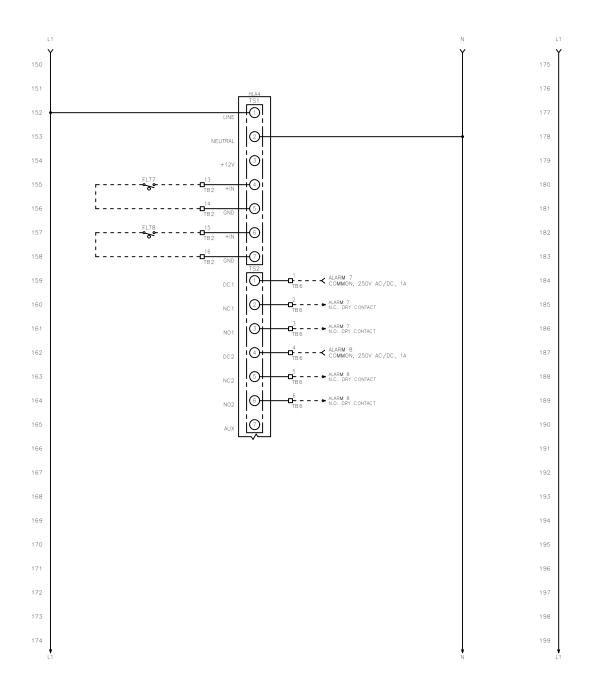

 \circ **(**+)-(NI)-- (ND- \oplus Θ

NOTES:

-S4 SUFFIX INDICATES ALL FLOATS ARE NORMALLY CLOSED

-32 SUFFIX INDICATES CUSTOM LABELING THAT MAY DIFFER FROM THE STANDARD LABELING AND/OR NORMALLY OPEN AND NORMALLY CLOSED MAY DIFFER FROM DRAWING ABOVE.

DASHED LINE INDICATES

FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE 60°C (167°F).

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

MM	07/23/16	
	DATE:	
DO	04/10/24	TITLE:
		DATE:

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.




HLA - 4X - 10CONTROL SCHEMATIC


DWG NO. SIZE 1596 PART NO. HLA-4X-10

D

SCALE NONE 4 OF 6 SHEET



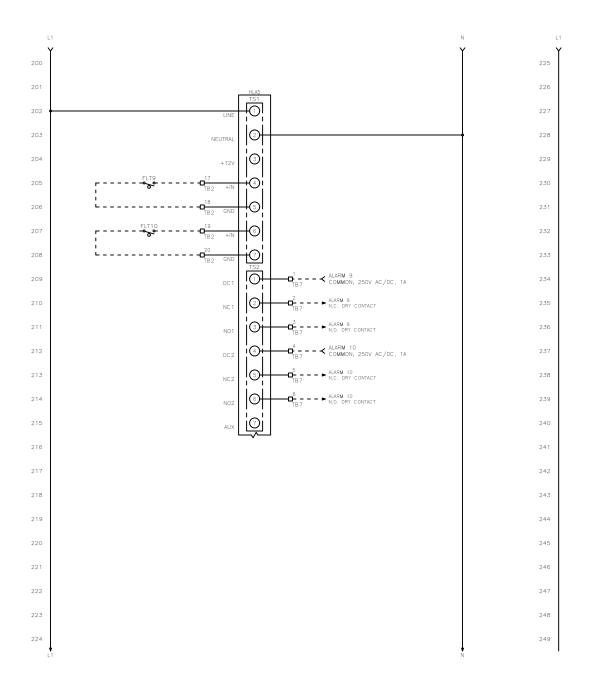

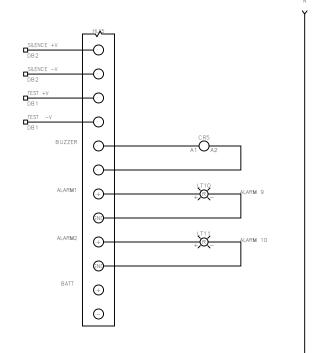

-S4 SUFFIX INDICATES ALL FLOATS ARE NORMALLY CLOSED

-32 SUFFIX INDICATES CUSTOM LABELING THAT MAY DIFFER FROM THE STANDARD LABELING AND/OR NORMALLY OPEN AND NORMALLY CLOSED MAY DIFFER FROM DRAWING ABOVE.

DASHED LINE INDICATES

FIELD WIRING.

TEMPERATURE RATING OF CONDUCTORS IS TO BE 60°C (167°F).

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

USE COPPER CONDUCTORS ONLY.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

DRAWN BY:		DATE:	
	MM	07/23/16	
APPROVED BY:		DATE:	
	DO	04/10/24	TITLE:

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.

SEE WATER Line.

HLA - 4X - 10CONTROL SCHEMATIC


SIZE DWG NO. 1596


SCALE NONE


PART NO. HLA-4X-10D 5 OF 6 SHEET



FIELD WIRING CONNECTIONS



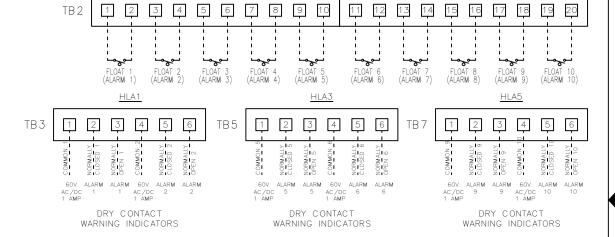

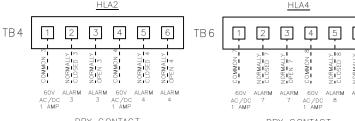

DRY CONTACT WARNING INDICATORS

DRY CONTACT WARNING INDICATORS

NOTES:

-\$4 SUFFIX INDICATES ALL FLOATS ARE NORMALLY CLOSED FLOATS.

-32 SUFFIX INDICATES CUSTOM LABELING THAT MAY DIFFER FROM THE STANDARD LABELING AND/OR NORMALLY OPEN AND NORMALLY CLOSED MAY DIFFER FROM DRAWING ABOVE.

DASHED LINE INDICATES FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE 60°C (167°F).

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

DRAWN BY:	DATE:					ITED'N		
MM	07/23/16							
APPROVED BY:	DATE:							
DO	04/10/24	TITLE:						
THE DRAWING	HLA-4X-10							
THIS DRAWING (CONTROL SCHEMATIC							
PROPRIETARY INF		O OTTITOE SOTIEMITATIO						
AND SHALL NOT		SIZE	DWG NO.		PART NO.			REV
OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.		В	,	1596		HLA-4	X-10	D
		SCALE	NONE			SHEET	6 OF	- 6

1