
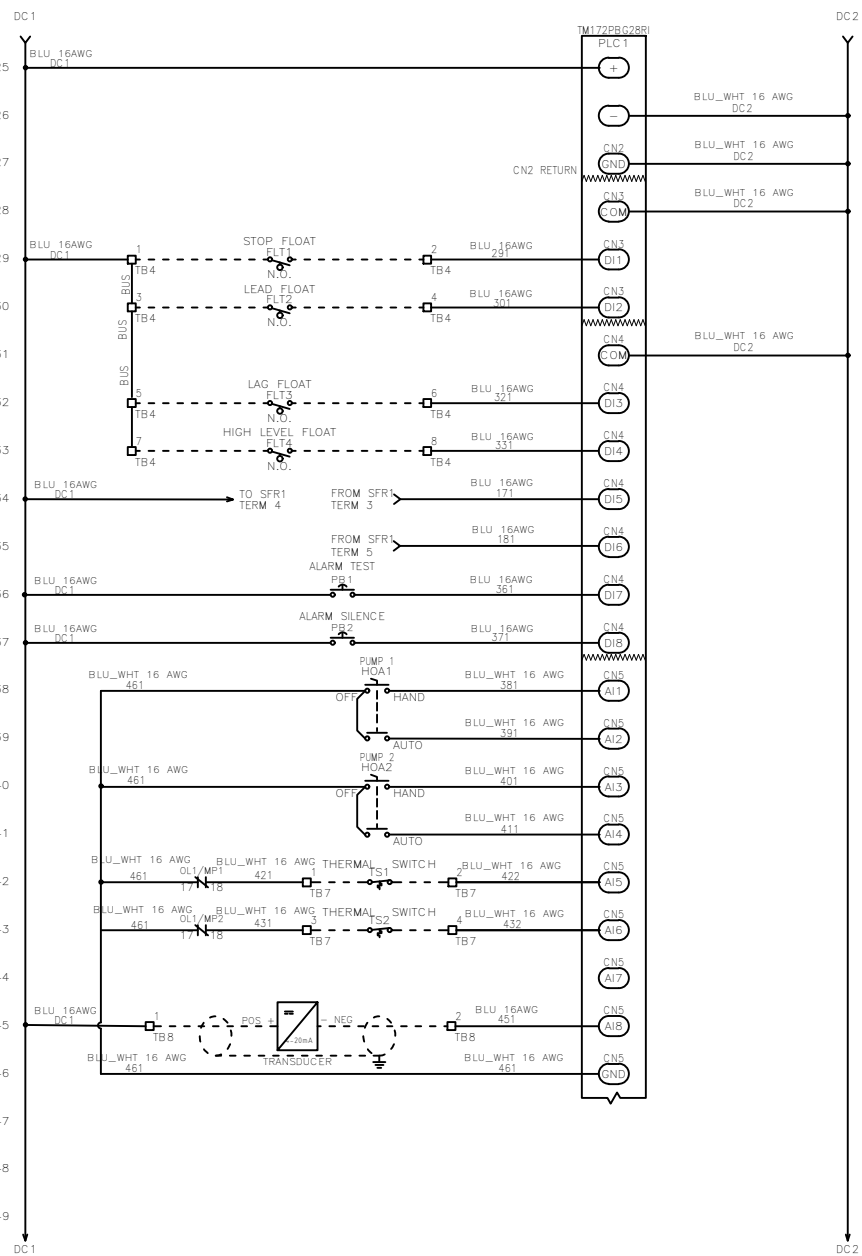


FRAME: TRD-T33

REVDATE: 0624

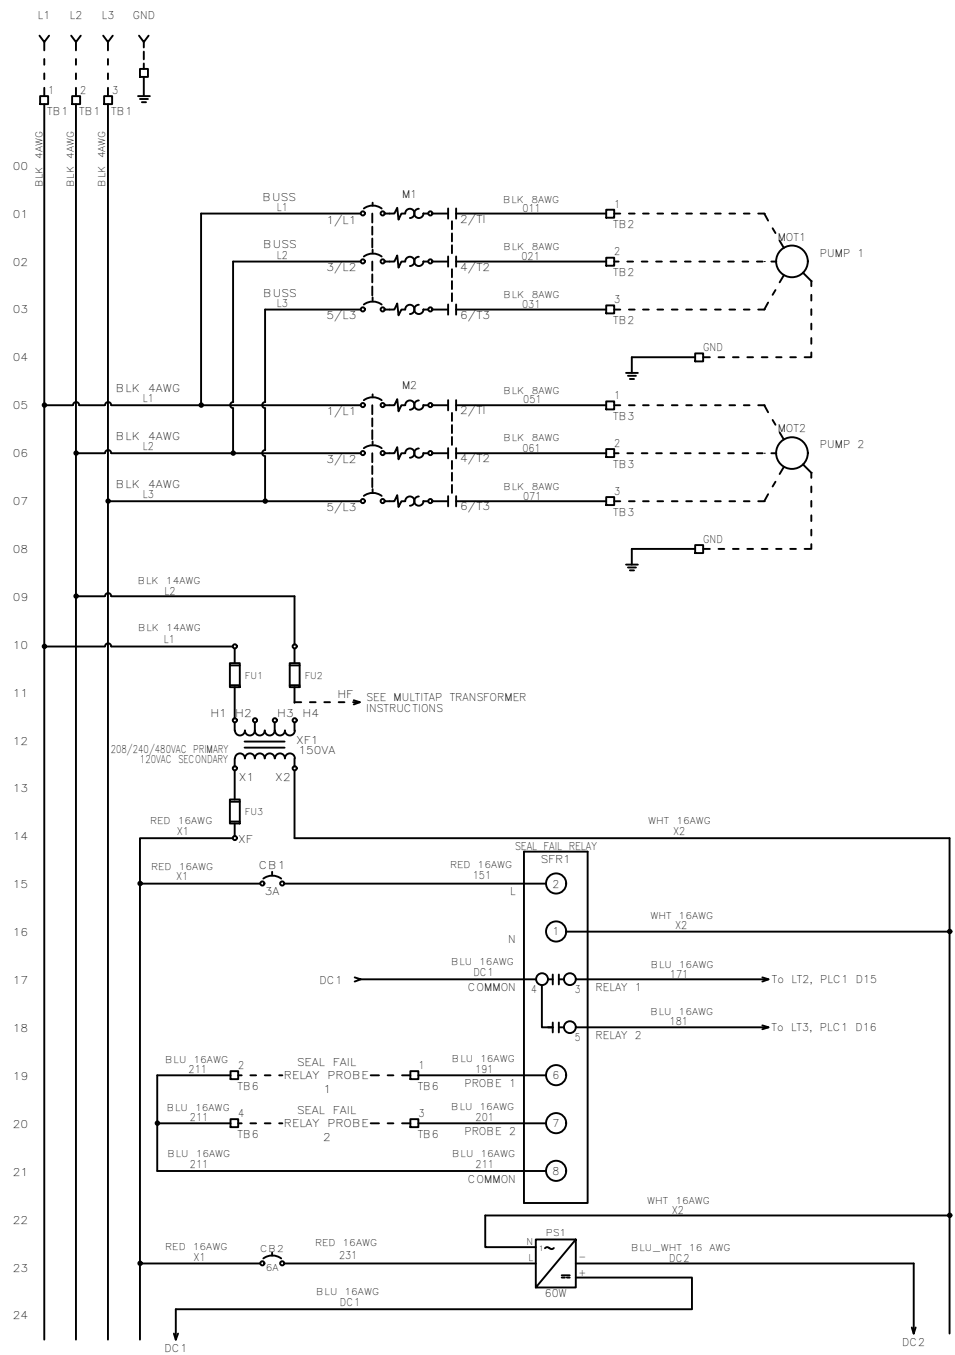

MULTI-TAP TRANSFORMER:

CONNECT FACTORY TAGGED WIRES TO APPROPRIATE TRANSFORMER VOLTAGE TAP. SEE BELOW FOR CONNECTIONS:

FOR 208V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H2.

FOR 240V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H3.

FOR 480V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H4.

DASHED LINE INDICATES FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE:
60°C (140°F) FOR UNDER 100A.
75°C (167°F) FOR OVER 100A.

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

FIELD WIRING TORQUE SPECS.



TERMINAL BLOCK UT 2,5	5 IN-LB
TERMINAL BLOCK UT 4	7 IN-LB
TERMINAL BLOCK UT 6	15 IN-LB
TERMINAL BLOCK UT 10	15 IN-LB
TERMINAL BLOCK UT 16	25 IN-LB
TERMINAL BLOCK UT 35	30 IN-LB
TS1, TS2, J2 & J3 PCB	5 IN-LB
TRANSFORMER H1F, H2F & H3F	15 IN-LB
TRANSFORMER H1, H2 & H3	10 IN-LB
DS1 VLS3P63-125 R2	45 IN-LB
DS1 LK4JU3CN 100A	36 IN-LB
DS1 LK4MU3N 200A	200 IN-LB
M1/ M2 T1, T2 & T3	15 IN-LB

UL #:	E320866
TOTAL FLA:	66 A
LARGEST MOT. FLA	32 A
VOLTAGE:	208/240/480 VAC
PHASE:	3 PH
FREQUENCY:	60 Hz
ENCLOSURE TYPE:	3R/4X
SHORT CIRCUIT CURRENT:	5KA RMS SYMMETRICAL
	600V MAXIMUM



DRAWN BY:	JED
DATE:	08/28/20
APPROVED BY:	DO
DATE:	06/19/24
THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN AUTHORIZATION.	




TITLE: TRD-T33 SCHEMATIC			
SIZE	DWG NO.	PART NO.	REV
B	1838		F
SCALE	NONE		SHEET 1 OF 2

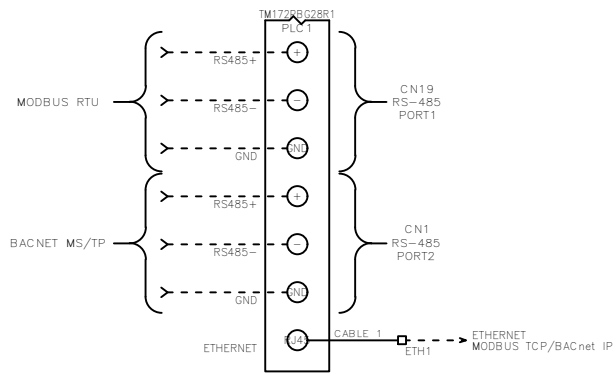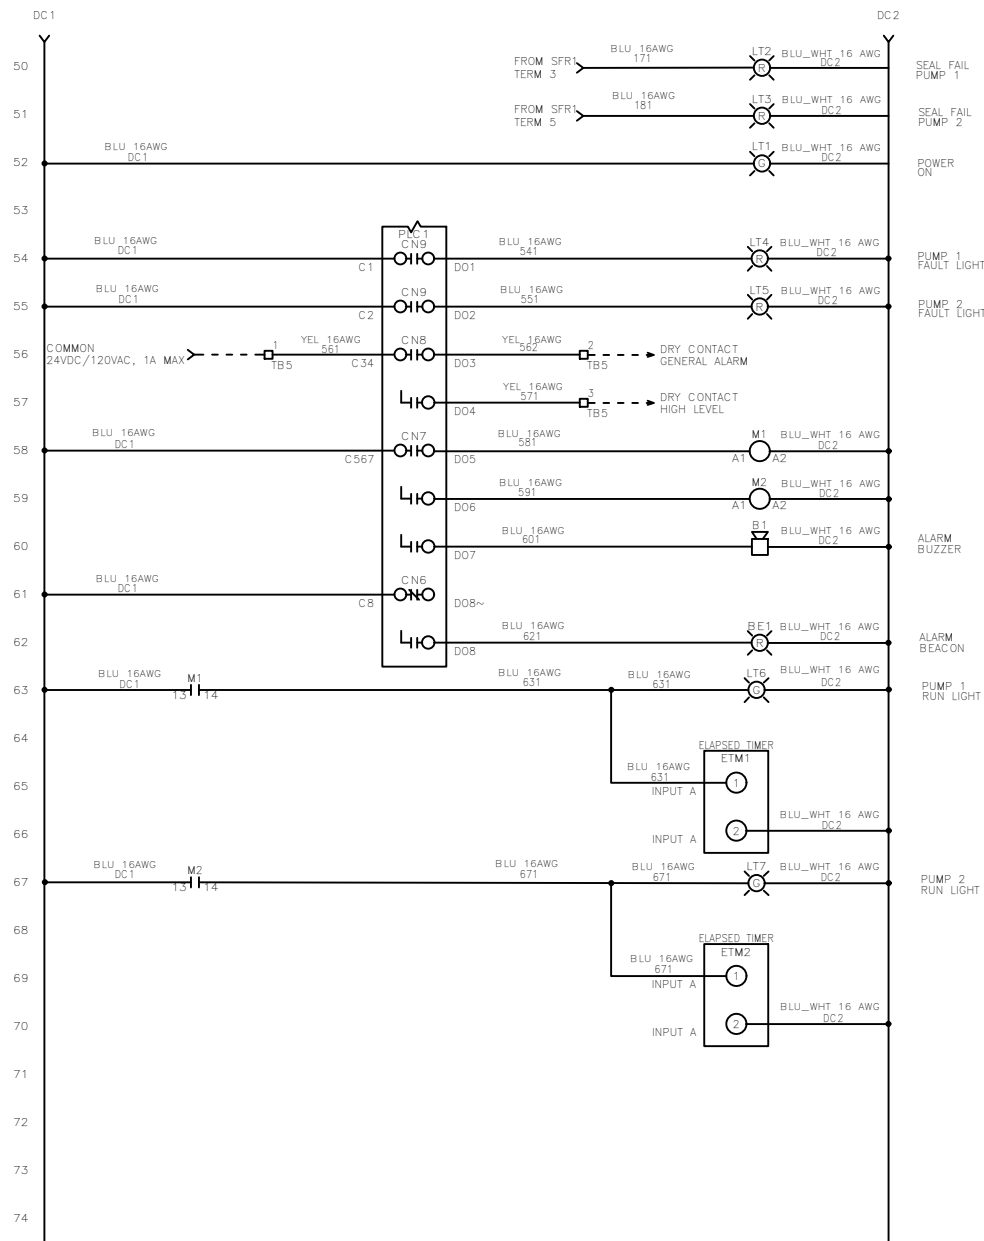

FIELD WIRING CONNECTIONS

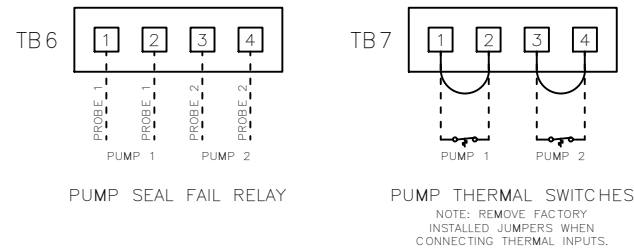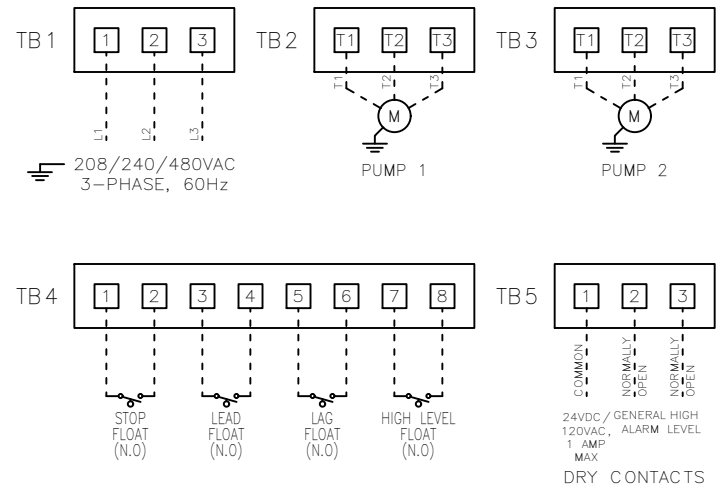

TRANSFORMER FIELD WIRING

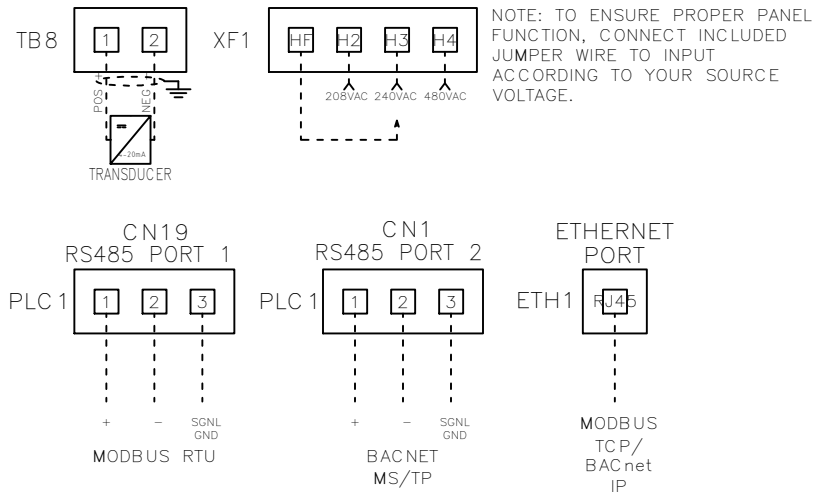

MULTI-TAP TRANSFORMER:

CONNECT FACTORY TAGGED WIRES TO APPROPRIATE TRANSFORMER VOLTAGE TAP. SEE BELOW FOR CONNECTIONS:

FOR 208V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H2.

FOR 240V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H3.

FOR 480V OPERATION, CONNECT TO FUSE INPUT HF & TO TRANSFORMER TAP H4.

----- DASHED LINE INDICATES FIELD WIRING.

USE COPPER CONDUCTORS ONLY.

TEMPERATURE RATING OF CONDUCTORS IS TO BE:
60°C (140°F) FOR UNDER 100A.
75°C (167°F) FOR OVER 100A.

BRANCH CIRCUIT PROTECTION SHALL BE PROVIDED BY THE INSTALLER: MUST BE SIZED ACCORDING TO PUMP/MOTOR MANUFACTURING SPECIFICATIONS.

VERIFY CORRECT OPERATION OF CONTROL PANEL AFTER INSTALLATION IS COMPLETE.

FIELD WIRING TORQUE SPECS.		UL #:	
TERMINAL BLOCK UT 2,5	5 IN-LB	E320866	
TERMINAL BLOCK UT 4	7 IN-LB	TOTAL FLA:	LARGEST MOT. FLA
TERMINAL BLOCK UT 6	15 IN-LB		
TERMINAL BLOCK UT 10	15 IN-LB	66 A	32 A
TERMINAL BLOCK UT 16	25 IN-LB	VOLTAGE:	PHASE:
TERMINAL BLOCK UT 35	30 IN-LB		
TS1, TS2, J2 & J3 PCB	5 IN-LB	208/240/480 VAC	3 PH
TRANSFORMER H1F, H2F & H3F	15 IN-LB	FREQUENCY:	ENCLOSURE TYPE:
TRANSFORMER H1, H2 & H3	10 IN-LB		
DS1 VLS3P63-125 R2	45 IN-LB	SHORT CIRCUIT CURRENT:	
DS1 LK4JU3CN 100A	36 IN-LB	5KA RMS SYMMETRICAL	
DS1 LK4MU3N 200A	200 IN-LB	600V MAXIMUM	
M1/ M2 T1, T2 & T3	15 IN-LB		



TITLE:			
TRD-T33 SCHEMATIC			
SIZE	DWG NO.	PART NO.	REV
B	1838	TRD-T33	F
SCALE		SHEET	
NONE		2 OF 2	